

OSLO

**Inspiration for those who aim for sober minimalism
with a twist.**


Scandinavian design is popular because it focusses on
craftsmanship and materials.

The philosophy behind the style remains relevant
today; maximize light at every turn. The dots give this
collection a modern and stylish twist.




Oslo


OF= 6%

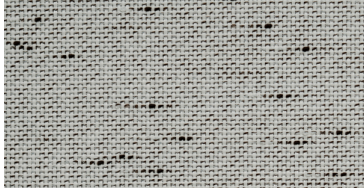

DJC 001 Plottet Point Chestnut

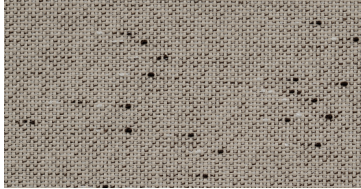

DJE001 Plottet Point Pearl

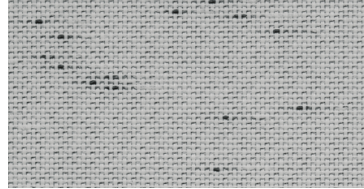

DJC 1616 Plottet Point Coffee

Oslo

OF=6%

Fabric

Type of fabric	24% Polyester, 76% PVC
Weave pattern	Basket Weave
Widths	300 cm
Roll length	30 ml

Technical specifications	Average values	Standar
Weight	400 g/m ²	ASTM D 1777 : 1996
Thickness	1.03 mm	ASTM D 3776 : 2009
Fire resistance*	B-s2,d0 Clase 1	UNE EN 13501-1:2007 UNE EN 13773-2003
Color fastness (scale blue)	≥7	ISO 105 b02 : 2000
Ultra violet blocking	95%	AATCC 183 : 2010
Antibacterial	complies	ASTM G21
Lead free	complies	REACH Regulation
Environment	complies	Standard 100 Greenguard
Acoustic	under testing	ASTM C423-09a
Warranty	5 years	

Processing

Cutting	Crush cut, Ultrasonic
Welding	Thermal, HF, Ultrasonic, Sewing.
Cleaning	Remove dust with soft brush or soft sponge and clear water.

Additional information



5 years warranty



Energy saving



Easy maintenance



Indoor comfort



Printable



Flame retardant



Lead free






These properties are given as indicate and don't have any contractual value.

*For other international test, please contact us.

Oslo

OF=6%

Decorative Collection	Color	Solar Heat & Light Control				Gtot			
Article		Ts	Rs	As	Tv	A	B	C	D
DJC 001 Plottet Point Chesnut		22	60	19	18	0.39	0.40	0.38	0.26
DJE 001 Plottet Point Pearl		16	45	39	12	0.47	0.48	0.43	0.27
DJC 1616 Plottet Point Coffee		22	57	21	19	0.41	0.42	0.39	0.26

Ts: Solar transmission Rs: Solar Reflection As: Solar absorption Tv: Visible light transmission Gtot: Total solar energy transmittance